




Vitesse de rotation - Drehzahl - rpm	2000 - 50000 1/min
Puissance - Leistung - Power	3 kW
Couple - Drehmoment - Torque	0.72 Nm
Diamètre du boîtier Gehäusedurchmesser Housing diameter	60 mm
Changement d'outils Werkzeugwechsel Tool change	pneumatique pneumatisch pneumatical
	5 - 6 bar

**Porte-pinces, pinces et écrous E court**  
**Spannzangenhalter, Zangen und Muttern E kurz**  
**Collet chucks, collets and nuts E short**


équilibré  
ausgewuchtet  
balanced

0.1 gmm

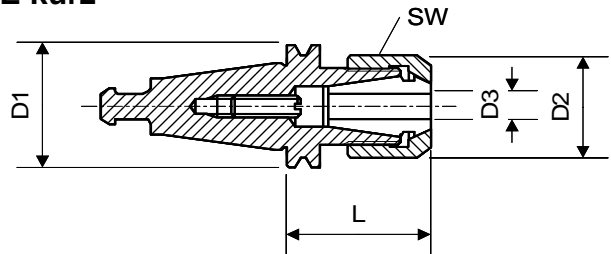

Gr.	Art.	L	D1	D2	D3	Pince Spannzange Collet	Ecrou équilibré gewuchtete Mutter balanced Nut	SW
11.5 / 5°	61-12510	24.8	17.5	16.7	0.5-7	EX12 75-12200 ESX12 75-12300 ET1-12... Ø + DIN, ISO, J	61-12721	15

**Tasseau ébauché**  
**Rohling**  
**Blank**

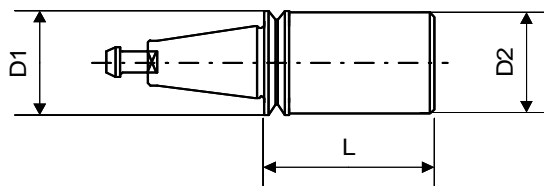

Gr.	Art.	L	D1	D2
11.5 / 5°	89-11500	29.5	17.5	17.3